


**NOTE :**

- Modulating board**  
 Input Signal: 4-20mA, 1-5V, 2-10V  
 (It is suggested to use the shielding wire and its length should not exceed 30m.)  
 Output Signal : 4-20mA, 2-10V
- Using less than 5A current for "A ~ F".
- P4 will connect when the actuator does n't reach the (normal) end of travel previously set within 15 sec.

THE DESIGN AND DISCLOSURE CONTAINED IN THIS DRAWING WAS ORIGINATED BY, AND IS EXCLUSIVE PROPERTY OF A-T CONTROLS, INC. IT IS FURNISHED FOR VENDOR INFORMATION ONLY AND IS NOT AN AUTHORIZATION -OR- LICENSE TO MAKE THIS CONSTRUCTION OR TO FURNISH THIS INFORMATION TO OTHERS. ALL DRAWINGS MUST BE RETURNED TO A-T CONTROLS, INC. ON DEMAND. THIS DRAWING IS NOT TO BE REPRODUCED OR COPIED IN ANY FORM WITHOUT THE EXPRESS WRITTEN PERMISSION OF A-T CONTROLS, INC.

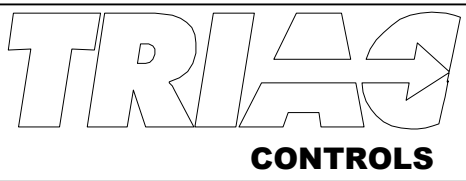

Division of A-T Controls, Inc.  
 9955 International Blvd  
 Cincinnati, Ohio 45246  
 Phone: (513) 247-5465  
 Fax: (513) 247-5462

|   |            |          |
|---|------------|----------|
| DRAWN<br>SAH  | CHECKED BY | APPROVED |
| DATE<br>11/26/13  | DATE       | DATE     |
| TITLE<br>FSEM-440 THRU 2300<br>MODULATING CONTROL<br>120VAC / 1 PHASE / 50-60HZ |            |          |

|      |      |    |
|------|------|----|
| ECN  | DATE | BY |
| ECN# | DATE | BY |

