

RTFE seats are standard, but various options are available for seat materials. The 50/50 STFE seat option is excellent for services that call for higher temperatures and more difficult applications, including steam. Call us for details.

HOW TO ORDER MANUAL VALVES

SAMPLE PART #
D9C-F1-0300-XXX- -

Valve Series	Body Material	End Connection	Valve Size	Seat Material	Additional Special Designation
--------------	---------------	----------------	------------	---------------	--------------------------------

See part number matrix for itemized options

Easy to Automate!

See automated data sheets for pre-sized assemblies



Pneumatic



Electric

D9-3R-20250325
Copyright 2013 A-T Controls, Inc.



A-T Controls, Inc.

Series D9

Direct Mount Split Body Flanged Ball Valve

Sizes 1/2"-12"

Available in 316SST or WCB

ASME Class 150

Full Port Design

Superior Live Loaded Packing System

ISO 5211 Actuator Mounting Pad

Blowout Proof Stem w/ Dual Anti-Static Devices

RTFE Seats Standard

Pyramidal Stem Seal Design

Monel Ball & Stem Available

Lockable Manual Handle

STANDARDS

Design
Face to Face
Flange Dimensions
Pressure Testing
Mounting
CE Approval
Material Certification
Quality Assurance

ASME B16.34 (fully conforms)
ASME B16.10
ASME B16.5
API 598
ISO 5211
2014/68/EU Module H
EN 10204-3.1 MTR
ISO 9001:2015



TABLE OF CONTENTS:

Page 2,3 - Materials & Dimensions
Page 4 - Technical Data
Page 5 - Double Acting
Page 6 - Spring Return
Page 7 - Electric
Page 8 - How to Order



A-T Controls, Inc.

9955 International Blvd.
Cincinnati, Ohio 45246
www.atcontrols.com

PHONE (513) 247-5465
FAX (513) 247-5462
sales@atcontrols.com

Series D9

High Performance, Full Port Split Body Ball Valve Series D9 (ASME Class 150)

1/2" to 6"

MATERIAL LIST

NO.	PART NAME	QTY	STAINLESS STEEL	CARBON STEEL	REPAIR KIT
1	BODY	1	ASTM A351 GRADE CF8M	ASTM A216 GRADE WCB	
2	END CAP	1	ASTM A351 GRADE CF8M	ASTM A216 GRADE WCB	
3	BALL	1	ASTM A351 GRADE CF8M	ASTM A351 GRADE CF8M	
4	SEAT	2	RTFE	RTFE	✓
5	JOINT GASKET	1	TFM™-1600	TFM-1600	✓
6	STEM	1	ASTM A276 SS316	ASTM A276 SS316	
7	STEM SEAL	1	TFM™-1600	TFM-1600	✓
8	GLAND PACKING	1 ^	PTFE	PTFE	✓
9	GLAND WASHER	1	RTFE	RTFE	✓
10	GLAND BUSHING	1	AISI 304	AISI 304	
11	BELLEVILLE WASHER	2	AISI 301	AISI 301	
12	LOCK SADDLE	1	AISI 304	AISI 304	
13	STEM NUT	1	AISI 304	AISI 304	
14	STEM WASHER	1	AISI 304	AISI 304	
15	HANDLE	1	AISI 304	AISI 304	
16	HANDLE SLEEVE	1	VINYL	VINYL	
17	BODY NUT	*	ASTM A194 GRADE 8	ASTM A194 GRADE 8	
18	BODY STUD	*	ASTM A193 GRADE B8	ASTM A193 GRADE B8	
19	STOP BOLT	1	AISI 304	AISI 304	
20	STOP BOLT NUT	1	AISI 304	AISI 304	
21	HANDLE LOCK	1	AISI 304	AISI 304	
22	O-RING	1	FKM	FKM	✓
23	ANTI-STATIC DEVICE	2	AISI 316	AISI 316	
24	HANDLE NUT	1	AISI 304	AISI 304	






^ PACKING SET

* 1/2" THRU 2" QTY = 4 PCS

* 2-1/2" THRU 4" QTY =

8 PCS

*6" QTY =10 PCS

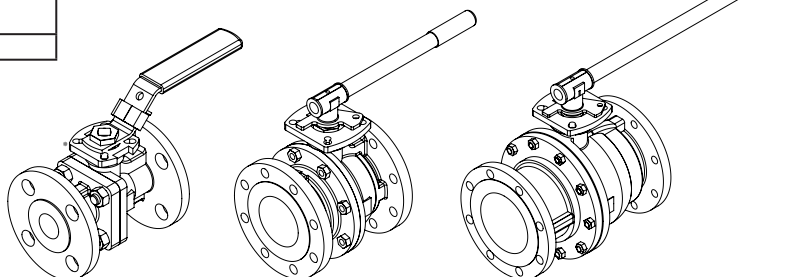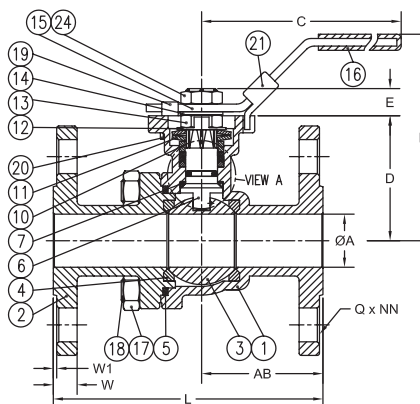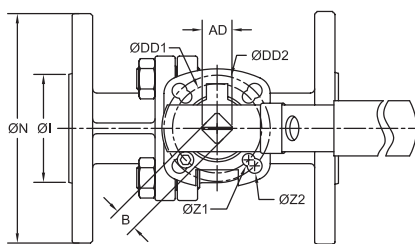

BENT HANDLE
SIZES 1/2" - 2-1/2"

PIPE HANDLE
SIZES 3" - 4"

PIPE HANDLE
SIZE 6"

NOTE: A-T CONTROLS RECOMMENDS A GEAR FOR 6" VALVES AND LARGER


DIMENSIONS (IN)

SIZE	A	B	C	D	E	F	I	J	L	N	Q	W	W1	Z1	Z2	AB	AC	AD	DD1	DD2	NN	ISO 5211	(LBS)
1/2"	0.59	0.433	6.50	1.84	0.39	3.30	1.38	2.38	4.26	3.50	0.63	0.44	0.06	0.26	0.28	1.84	1.26	0.55	1.654	1.969	4	F04/F05	4.0
3/4"	0.79	0.433	6.50	2.02	0.39	3.45	1.69	2.74	4.62	3.88	0.63	0.44	0.06	0.26	0.28	2.18	1.26	0.55	1.654	1.969	4	F04/F05	5.0
1"	0.98	0.433	6.50	2.31	0.41	3.81	2.00	3.12	5.00	4.25	0.63	0.44	0.06	0.26	0.28	2.21	1.26	0.55	1.654	1.969	4	F04/F05	7.0
1-1/2"	1.50	0.748	10.32	3.51	0.75	5.60	2.88	3.88	6.50	5.00	0.63	0.56	0.06	0.39	0.47	2.83	2.09	0.94	2.756	4.016	4	F07/F10	14.5
2"	1.97	0.748	10.32	3.80	0.75	5.78	3.62	4.75	7.02	6.00	0.75	0.63	0.06	0.39	0.47	3.38	2.09	0.94	2.756	4.016	4	F07/F10	20.5
2-1/2"	2.56	0.748	10.32	4.57	0.75	6.75	4.12	5.50	7.48	7.00	0.75	0.69	0.06	0.39	0.47	3.06	2.09	0.94	2.756	4.016	4	F07/F10	31.0
3"	3.15	0.866	14.37	5.22	0.91	8.05	5.00	6.00	8.01	7.50	0.75	0.75	0.06	0.47	0.55	4.01	2.55	1.18	4.016	4.921	4	F10/F12	41.0
4"	3.94	0.866	14.37	6.18	0.91	9.00	6.19	7.50	9.00	9.00	0.75	0.94	0.06	0.47	0.55	4.07	2.55	1.18	4.016	4.921	8	F10/F12	67.5
6"	5.91	1.063	29.53	8.28	1.12	12.50	8.50	9.50	15.50	11.0	0.87	1.00	0.06	0.55	0.71	7.00	2.97	1.41	4.921	5.511	8	F12/F14	145.0

Series D9


High Performance, Full Port Split Body Ball Valve Series D9 (ASME Class 150)

Pressure vs. Temperature - Series D9/FD9-F1
Seat Pressure Ratings

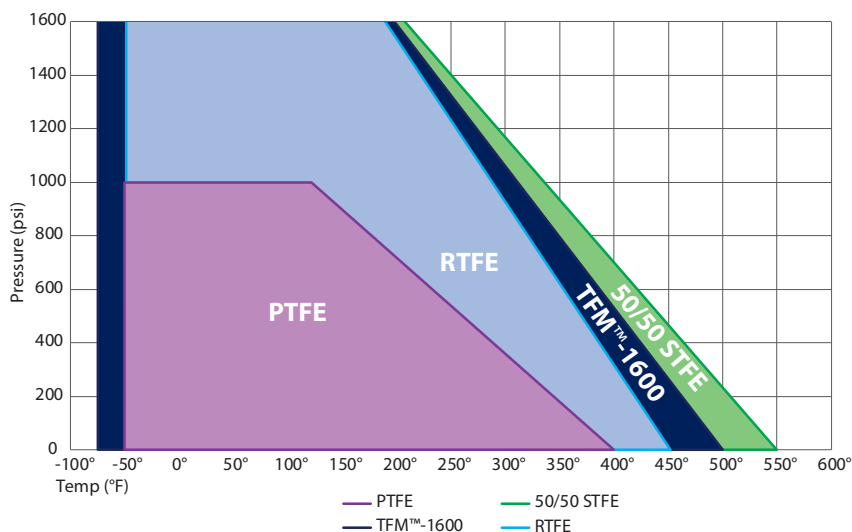

Temp	Pressure - Seat Material			
	RTFE	STFE	PTFE	TFM™-1600
-75°				2000
-50°	2000	2000	1000	2000
100°	2000	2000	1000	2000
122°	2000	2000	1000	2000
150°	1829	1869	899	1852
200°	1524	1636	719	1587
250°	1220	1402	540	1323
300°	915	1168	360	1058
350°	610	935	180	794
400°	305	701	0	529
450°	0	467		265
500°		234		0
550°		0		

Pressure vs. Temperature - Series D9/FD9-F1
Body & End Cap Ratings ASME B16.34

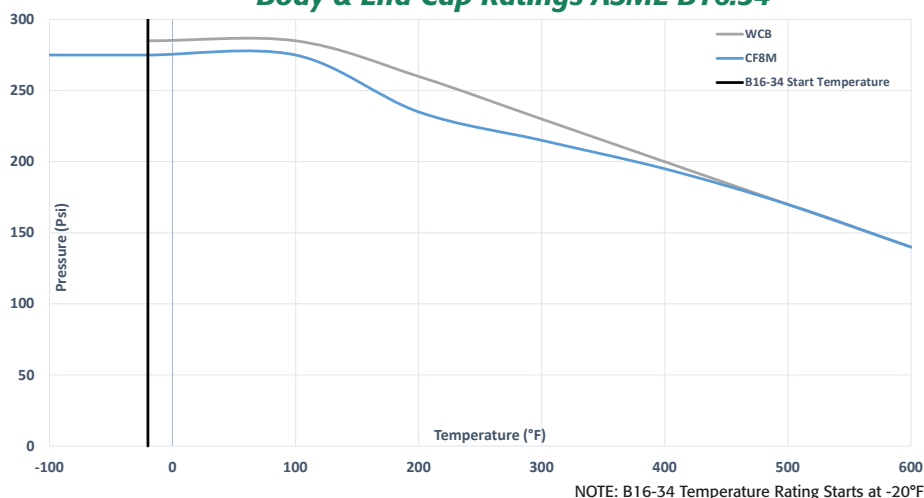

Temp (°F)	WCB psi	CF8M psi
-20°	285	275
100°	285	275
200°	260	235
300°	230	215
400°	200	195
500°	170	170
600°	140	140

Component Temperature Ratings

COMPONENT	MATERIAL	TEMPERATURE
Stem Seal	TFM™-1600	-75°F to 500°F
Gaskets	TFM™-1600	-75°F to 500°F
Seats (Other Materials Available)	PTFE	-50°F to 400°F
	RTFE (standard)	-50°F to 450°F
	TFM™-1600	-75°F to 500°F
	50/50 STFE	-50°F to 550°F
O-Rings	FKM (standard)	-20°F to 450°F
	Markez® Z1028	5°F to 608°F
	Kalrez® 4079	30°F to 600°F
	Chemraz® 505	-22°F to 446°F
	Kalrez® 6375	-4°F to 527°F
	Perlast® G75M	5°F to 500°F
	Chemraz® 564	-40°F to 445°F
	Low Temp Buna	-65°F to 275°F
	EPDM	-70°F to 250°F
	Silicone	-60°F to 400°F

NOTE: At temperature, valves are limited by either the valve body/end cap pressure ratings, seat pressure ratings, or packing/stem seal/gaskets; whichever is lower.

Break Away Torque for RTFE Seats

SIZE	IN.-LBS.
1/2"	45
3/4"	73
1"	91
1-1/2"	230
2"	297
2-1/2"	535
3"	768
4"	1250
6"	3000
8"	6,500
10"	13,000*
12"	26,000*

*NOTE: 10" & 12" torques are at 100 psig with clean, lubricating fluid. Please consult factory for torques at full differential pressure.

Published torques are based on full differential pressure with clean water. Consult the Application Sizing Guide for assistance with sizing actuators.

SIZE	Cv
1/2"	15
3/4"	45
1"	85
1-1/2"	275
2"	460
2-1/2"	700
3"	1,100
4"	2,200
6"	5,150
8"	10,000
10"	16,400
12"	23,800

Pneumatic Double Acting

Automated Ball Valve Package

Series D9
ASME Class 150
Flanged Ball Valve
Direct Mount

Sizes 1/2"-12"

Available in 316SST or WCB

ASME Class 150

Full Port Design

Superior Live Loaded
Packing System

Blowout Proof Stem w/ Dual
Anti-Static Devices

RTFE Seats Standard

Pyramidal Stem Seal Design



Monel Ball & Stem Available

STANDARDS

Design	ASME B16.34 (fully conforms)
Face to Face	ASME B16.10
Flange Dimensions	ASME B16.5
Pressure Testing	API 598
Mounting	ISO 5211
CE Approval	2014/68/EU Module H
Material Certification	EN 10204-3.1 MTR
Quality Assurance	ISO 9001:2015



**ASME Class 150 Flanged
Direct Mount**

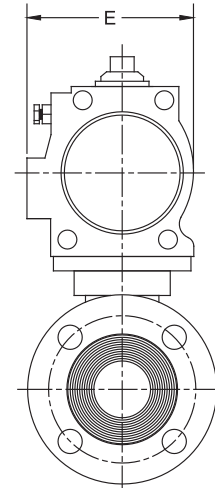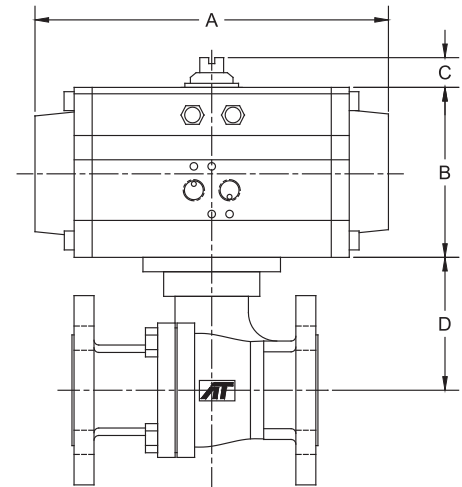

DIMENSIONS (IN)

VALVE SIZE	A	B	C	D	E	VALVE Cv
1/2"	6.50	2.84	0.787	1.84	2.82	15
3/4"	6.50	2.84	0.787	2.02	2.82	45
1"	6.50	2.84	0.787	2.31	2.82	85
1-1/2"	9.29	4.30	0.787	3.51	4.18	275
2"	9.29	4.30	0.787	3.80	4.18	450
2-1/2"	9.29	4.30	0.787	4.57	4.18	700
3"	13.39	6.14	0.787	5.22	5.59	1,100
4"	13.39	6.14	0.787	6.18	5.59	2,200
6"	15.35	6.81	1.181	8.28	5.98	5,150

DIMENSIONS SHOWN ARE FOR ASSEMBLIES SIZED FOR 80 PSI SUPPLY



SIZED FOR 80 psi AIR SUPPLY

SIZE	MODEL
1/2"	D9-F1-050/3RDD-XX
3/4"	D9-F1-075/3RDD-XX
1"	D9-F1-100/3RDD-XX
1-1/2"	D9-F1-150/3RFD-XX
2"	D9-F1-200/3RFD-XX
2-1/2"	D9-F1-250/3RFD-XX
3"	D9-F1-300/3RJD-XX
4"	D9-F1-400/3RJD-XX
6"	D9-F1-600/3RKD-XX

SIZED FOR 60 psi AIR SUPPLY

SIZE	MODEL
1/2"	D9-F1-050/3RDD-XX
3/4"	D9-F1-075/3RDD-XX
1"	D9-F1-100/3RDD-XX
1-1/2"	D9-F1-150/3RFD-XX
2"	D9-F1-200/3RFD-XX
2-1/2"	D9-F1-250/3RFD-XX
3"	D9-F1-300/3RJD-XX
4"	D9-F1-400/3RJD-XX
6"	D9-F1-600/3RKD-XX

SAMPLE PART # D9C-F1-150/3RFD-XX

Valve Series	Carbon Steel	End Connection	Seat Material	Valve Size	TRIAC Actuator Series	Actuator Size	Double Acting	SUFFIX 1: Solenoids	SUFFIX 2: Limit Switch
--------------	--------------	----------------	---------------	------------	-----------------------	---------------	---------------	---------------------	------------------------

See automated part
number matrix on back
cover for complete part
number and options.

OPTIONS

SUFFIX 1	Accessories/Options	Model no.
X	No Specials	
A	TYPE 4 Solenoid 120VAC	TVCS-X411-4N-A120
B	TYPE 7 Solenoid 120VAC	TVC6-X411-7N-A120
C	Intrinsically Safe Solenoid	TVIS-X411-4N-D24
D	TYPE 4 Solenoid 24VDC	TVCS-X411-4N-D24
F	TYPE 7 Solenoid 24VDC	TVC6-X411-7N-D24
Q	TYPE 4 SST Solenoid 120VAC	TVSS-X411-4N-A120
M	TYPE 7 SST Solenoid 120VAC	TVSS-X411-7N-A120
L	TYPE 4 SST Solenoid 24VDC	TVSS-X411-4N-D24
N	TYPE 7 SST Solenoid 24VDC	TVSS-X411-7N-D24
P	Pneumatic Positioner	PPR-1200
E	Electro-Pneumatic Positioner	EPR-1000
SUFFIX 2	Accessories	Model no.
X	No Specials	
A	TYPE 4 Limit Switch	APL-210N
B	TYPE 7 Limit Switch	APL-510N
C	Intrinsically Safe Limit Switch	APL-218N
Q	TYPE 4 SST Limit Switch	APL-910N
M	TYPE 7 SST Limit Switch	APL-510S
H	NEMA 4 Std. Enc.	APL-310N

Other options available - call for details.

Actuators are sized based on full differential pressure with clean water. Consult the Application Sizing Guide for assistance with sizing actuators.

Pneumatic Spring Return

Automated Ball Valve Package

Series D9
ASME Class 150
Flanged Ball Valve
Direct Mount

Sizes 1/2"-12"

Available in 316SST or WCB

ASME Class 150

Full Port Design

Superior Live Loaded
Packing System

Blowout Proof Stem w/ Dual
Anti-Static Devices

RTFE Seats Standard

Pyramidal Stem Seal Design



Monel Ball & Stem Available

STANDARDS

Design	ASME B16.34 (fully conforms)
Face to Face	ASME B16.10
Flange Dimensions	ASME B16.5
Pressure Testing	API 598
Mounting	ISO 5211
CE Approval	2014/68/EU Module H
Material Certification	EN 10204-3.1 MTR
Quality Assurance	ISO 9001:2015




**ASME Class 150 Flanged
Direct Mount**

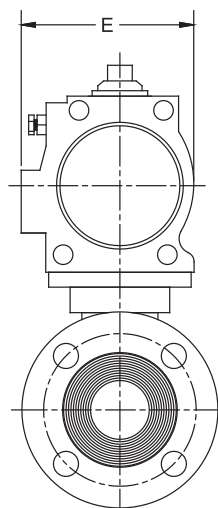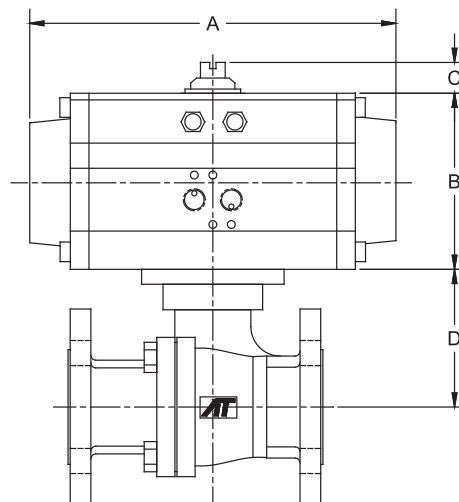

DIMENSIONS (IN)

VALVE SIZE	A	B	C	D	E	VALVE Cv
1/2"	7.60	3.47	0.787	1.84	3.35	15
3/4"	7.60	3.47	0.787	2.02	3.35	45
1"	7.60	3.47	0.787	2.31	3.35	85
1-1/2"	9.29	4.30	0.787	3.51	4.18	275
2"	11.02	4.61	0.787	3.80	4.27	450
2-1/2"	11.50	5.28	0.787	4.57	5.78	700
3"	15.35	6.81	1.181	5.22	5.98	1,100
4"	15.35	6.81	1.181	6.18	5.98	2,200
6"	22.36	9.06	1.181	8.28	8.11	5,150

DIMENSIONS SHOWN ARE FOR ASSEMBLIES SIZED FOR 80 PSI SUPPLY



SERIES D9 150# Flanged Direct Mount

SIZED FOR 80 psi AIR SUPPLY	
SIZE	MODEL
1/2"	D9-F1-050/3RES-XX
3/4"	D9-F1-075/3RES-XX
1"	D9-F1-100/3RES-XX
1-1/2"	D9-F1-150/3RFS-XX
2"	D9-F1-200/3RGS-XX
2-1/2"	D9-F1-250/3RHS-XX
3"	D9-F1-300/3RKS-XX
4"	D9-F1-400/3RKS-XX
6"	D9-F1-600/3RPS-XX

SIZED FOR 60 psi AIR SUPPLY	
SIZE	MODEL
1/2"	D9-F1-050/3RE4-XX
3/4"	D9-F1-075/3RE4-XX
1"	D9-F1-100/3RF4-XX
1-1/2"	D9-F1-150/3RG4-XX
2"	D9-F1-200/3RG4-XX
2-1/2"	D9-F1-250/3RJ4-XX
3"	D9-F1-300/3RK4-XX
4"	D9-F1-400/3RL4-XX
6"	D9-F1-600/3RR4-XX

OPTIONS		
SUFFIX 1	Accessories/Options	Model no.
X	No Specials	
A	TYPE 4 Solenoid 120VAC	TVCS-X411-4N-A120
B	TYPE 7 Solenoid 120VAC	TVC6-X411-7N-A120
C	Intrinsically Safe Solenoid	TVIS-X411-4N-D24
D	TYPE 4 Solenoid 24VDC	TVCS-X411-4N-D24
F	TYPE 7 Solenoid 24VDC	TVC6-X411-7N-D24
Q	TYPE 4 SST Solenoid 120VAC	TVSS-X411-4N-A120
M	TYPE 7 SST Solenoid 120VAC	TVSS-X411-7N-A120
L	TYPE 4 SST Solenoid 24VDC	TVSS-X411-4N-D24
N	TYPE 7 SST Solenoid 24VDC	TVSS-X411-7N-D24
P	Pneumatic Positioner	PPR-1200
E	Electro-Pneumatic Positioner	EPR-1000
SUFFIX 2	Accessories	Model no.
X	No Specials	
A	TYPE 4 Limit Switch	APL-210N
B	TYPE 7 Limit Switch	APL-510N
C	Intrinsically Safe Limit Switch	APL-218N
Q	TYPE 4 SST Limit Switch	APL-910N
M	TYPE 7 SST Limit Switch	APL-510S
H	NEMA 4 Std. Enc.	APL-310N

Other options available - call for details.

Actuators are sized based on full differential pressure with clean water. Consult the Application Sizing Guide for assistance with sizing actuators.

SAMPLE PART #
D9C-F1-150/3RGS-XX

Valve Series | Carbon Steel | End Connection | Seat Material | Valve Size | TRIAC Actuator Series | Actuator Size | Spring Return | SUFFIX 1: Solenoids | SUFFIX 2: Limit Switch

See automated part number matrix on back cover for complete part number and options.

Electric

Automated Ball Valve Package

Series D9 ASME Class 150 Flanged Ball Valve Direct Mount

Sizes 1/2"-12"
Available in 316SST or WCB
ASME Class 150
Full Port Design
Superior Live Loaded
Packing System
Blowout Proof Stem w/ Dual
Anti-Static Devices
RTFE Seats Standard
Pyramidal Stem Seal Design
Monel Ball & Stem Available

STANDARDS

Design	ASME B16.34 (fully conforms)
Face to Face	ASME B16.10
Flange Dimensions	ASME B16.5
Pressure Testing	API 598
Mounting	ISO 5211
CE Approval	2014/68/EU Module H
Material Certification	EN 10204-3.1 MTR
Quality Assurance	ISO 9001:2015





**ASME Class 150 Flanged
Direct Mount**

DIMENSIONS (IN)

VALVE SIZE	A	B	C	D	E	VALVE Cv
1/2"	4.98	4.08	N/A	5.24	1.84	15
3/4"	4.98	4.08	N/A	5.24	2.02	45
1"	4.98	4.08	N/A	5.24	2.31	85
1-1/2"	4.98	4.08	N/A	5.24	3.51	275
2"	4.98	4.08	N/A	5.24	3.80	450
2-1/2"	9.02	13.31	10.43	10.55	4.57	700
3"	9.02	13.31	10.43	10.55	5.22	1,100
4"	10.20	14.49	11.26	11.42	6.18	2,200
6"	10.20	14.49	11.26	11.97	8.28	5,150

(D) DIMENSION IS FROM CENTERLINE TO END OF HANDWHEEL ON
2-1/2" - 6" OR MODULATING ACTUATORS 1/2" - 2".
FOR SPECIALS, CONSULT FACTORY

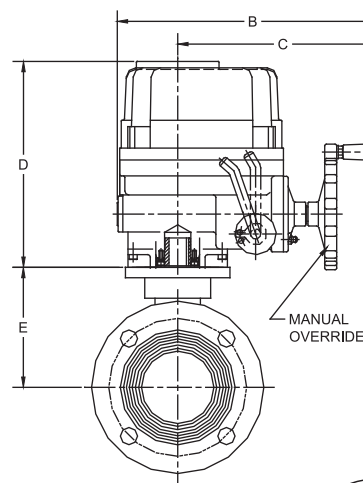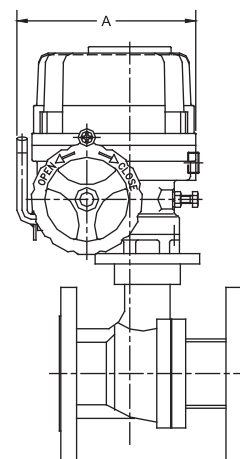

SERIES D9 150# Flanged Direct Mount

ON-OFF	
SIZE	MODEL
1/2"	D9-F1-050/WEA1-XX
3/4"	D9-F1-075/WEA1-XX
1"	D9-F1-100/WEA1-XX
1-1/2"	D9-F1-150/WEA1-XX
2"	D9-F1-200/WEA1-XX
2-1/2"	D9-F1-250/WEC1-XX
3"	D9-F1-300/WEC1-XX
4"	D9-F1-400/WEE1-XX
6"	D9-F1-600/WEF1-XX

MODULATING	
SIZE	MODEL
1/2"	D9-F1-050/WEA2-XX
3/4"	D9-F1-075/WEA2-XX
1"	D9-F1-100/WEA2-XX
1-1/2"	D9-F1-150/WEA2-XX
2"	D9-F1-200/WEA2-XX
2-1/2"	D9-F1-250/WEC2-XX
3"	D9-F1-300/WEC2-XX
4"	D9-F1-400/WEE2-XX
6"	D9-F1-600/WEF2-XX

OPTIONS

Suffix 1 Voltage / Accessory Model No.

X	No Specials
R	24VDC Electric Actuator
S	220VAC Electric Actuator
T	Other Voltage Electric Actuator
W	12VDC Electric Actuator
Y	24VAC Electric Actuator

* No voltage specified on electric assemblies denotes 120VAC

Suffix 2 Accessories

X	No Specials
1	HS1 High Speed Electric
2	HS2 High Speed Electric

Other options available - call for details
Actuators are sized based on full differential pressure
with clean water. Consult the Application Sizing Guide
for assistance with sizing actuators.

SAMPLE PART #
D9C-F1-150/WEA1-XX

Valve Series | Carbon Steel | End Connection | Seat Material | Valve Size | TRIAC Actuator Series | Actuator Size | On-Off

See automated part number matrix on back cover for complete part number and options.

SUFFIX 1: Voltage
SUFFIX 2: Options

Series D9

HOW TO ORDER: Manual Valves

2	Valve Series			
D9	Direct Mount Ball Valve, Full Port			
3	Body/Ball/Stem Material			
Blank	Valve Series Standard (316SST)			
A	Alloy 20 Body, Ball, & Stem			
C	Carbon Steel Body			
L	Low Carbon 316L Stainless Steel			
H	Carbon Body / Hastelloy Ball & Stem			
Q	Carbon Body / Monel Ball & Stem			
R	316 SST Body / Monel Ball & Stem			
T	Hastelloy C-276 Body, Ball & Stem			
D	CD3MN Body/Duplex SST Ball & Stem			
G	CE3MN Body/Super Duplex SST Ball & Stem			
P	CF8 (304 SST) Body/304 SST Ball & Stem			
4	End Connection			
F1	150# Flanged Ends			
5	Valve Size			
0050	1/2"	0300	3"	
0075	3/4"	0400	4"	
0100	1"	0600	6"	
0150	1-1/2"	0800	8"	
0200	2"	1000	10"	
0250	2-1/2"	1200	12"	

17-4 PH® is a registered trademark of AK Steel Corporation.
Chemraz® is a registered trademark of Greene, Tweed & Co.
TFM™ is a trademark of Dyneon™, a 3M Company.

Markez® is a registered trademark of Marco Rubber & Plastic Products Inc.
Perlast® is a registered trademark of Precision Polymer Engineering Limited.

6	Seat, Lining & Trim Materials			
X	Reinforced TFE Seats (RTFE)			
P	Virgin TFE Seats (PTFE)			
U	UHMWPE Seats			
S	50/50 STFE Seats			
C	25% Carbon Graphite, 75% PTFE Seats (CTFE)			
T	TFM™-1600 Seats			
E	All TFM™-1600 Seats, Seals, & Packing			
A	50% SS Powder / 50% TFM™-1600 (STFM) Seats			
F	PTFE Cavity Filler Seats			
H	TFM Cavity Filler Seats and Seals			
J	STFE Cavity Filler Seats			
R	RTFE Cavity Filler Seats			
M	MG1241 Seats			
Z	PEEK Seats (Required 17-4 PH® Stem)			
7	Operator Options			
X	No Specials/Series Standard Handle			
G	Gear Operator			
H	Gear Operator with Lockout Plate			
S	Spring Return (1/2" - 1")			
4	4" Lockable Stem Extension			
8	Special Designation			
X	No Specials, Series Standard			
O	Oxygen Cleaned			
V	Vented Ball			
E	Bonnet Extension Lockable Handle			
D	Degreased & Bagged			
A	Vented Ball, Degreased & Bagged			
B	Vented Ball, Oxygen Cleaned			


9	Special Designation	
Blank	No Designation, Valve Series Standard	
X	Multiple Option Designation	
A	17-4 PH® Stem	
B	XM-19 (Nitronic 50) Stem	
H	Hard Coated (HMF) Ball	
10	O-Ring	
X	Multiple Option Designation	
2	Markez® Z1028	
4	Karlez 4079	
5	Chemraz 505	
6	Karlez 6375	
7	Perlast® G75M	
9	Chemraz® 564	
B	Low Temp Buna	
E	EPDM	
S	Silicone	
11	Special Designation	
B	B7M Bolting	
E	CE/PED Certified	
M	Marine Epoxy Coating	

HOW TO ORDER MANUAL VALVES										
2	3	-	4	-	5	-	6	7	8	9 - 10 11
↓	↓		↓		↓		↓	↓	↓	↓
D9	C	-	F1	-	0150	-	X	X	X	

HOW TO ORDER: Automated Valves

2	Valve Series			
D9	Direct Mount Ball Valve, Full Port			
3	Body/Ball/Stem Material			
Blank	Valve Series Standard (316SST)			
A	Alloy 20 Body, Ball, & Stem			
C	Carbon Steel Body			
L	Low Carbon 316L Stainless Steel			
H	Carbon Body / Hastelloy Ball & Stem			
Q	Carbon Body/Monel Ball & Stem			
R	316 SST Body/Monel Ball & Stem			
T	Hastelloy C-276 Body, Ball & Stem			
D	CD3MN Body/Duplex SST Ball & Stem			
G	CE3MN Body/Super Duplex SST Ball & Stem			
P	CF8 (304 SST) Body/304 SST Ball & Stem			
4	End Connection			
F	150# Flanged Ends			
5	Seat, Lining & Trim Materials			
X	Reinforced TFE Seats (RTFE)			
P	Virgin TFE Seats (PTFE)			
U	UHMWPE Seats			
S	50/50 STFE Seats			
C	25% Carbon Graphite, 75% PTFE Seats (CTFE)			
T	TFM™-1600 Seats			
E	All TFM™-1600 Seats, Seals, & Packing			
A	50% SS Powder / 50% TFM™-1600 (STFM) Seats			
F	PTFE Cavity Filler Seats			
H	TFM Cavity Filler Seats and Seals			
J	STFE Cavity Filler Seats			
R	RTFE Cavity Filler Seats			
M	MG1241 Seats			
Z	PEEK Seats (Required 17-4 PH® Stem)			
6	Valve Size			
050	1/2"	200	2"	600 6"
075	3/4"	250	2-1/2"	800 8"
100	1"	300	3"	AAA 10"
150	1-1/2"	400	4"	BBB 12"

7 (A) Pneumatic Actuator - 3R, 3N, 3P Series			
3RC	3R10	3RM	3R850
3RD	3R20	3RN	3R1000
3RE	3R40	3RP	3R1200
3RF	3R80	3RR	3R1750
3RG	3R130	3RS	3R2400
3RH	3R200	3RT	3R2500
3RJ	3R300	3RU	3R2700
3RK	3R500	3RV	3R3300
3RL	3R700	3RW	3R3500
3R=Standard, 3N=Electroless Nickel Plating, 3P=Teflon™ (PTFE) Coating			
7 (A) Pneumatic Actuator - S2 Series			
S2C	S2-052	S2G	S2-125
S2D	S2-063	S2H	S2-140
S2E	S2-083	S2J	S2-160
S2F	S2-105	S2K	S2-210
7 (B) Pneumatic Action			
D	Double Acting (DA)		
S	Spring CW (5 springs)*		
O	Spring CCW (5 springs)*		
4	Spring CW (4 springs)**		
F	Spring CCW (4 springs)**		
6	Spring CW (6 springs)		
H	Spring CCW (6 springs)		
*2500 & 3500 80 psig spring **2500 & 3500 60 psig spring			
7	Actuator - Electric (On-Off)		
WEX1	WE-350	WEG1	WE-5200
WEA1	WE-500	WEH1	WE-6900
WEB1	WE-690	WEJ1	WE-10500
WEC1	WE-1350	WEK1	WE-17500
WED1	WE-1700	WEL1	WE-25900
WEE1	WE-2640	WEM1	WE-53000
WEF1	WE-4400	WEN1	WE-80000
7	Actuator - Electric (Modulating)		
WEA2	WEM-500	WEH2	WEM-6900
WEB2	WEM-690	WEJ2	WEM-10500
WEC2	WEM-1350	WEK2	WEM-17500
WED2	WEM-1700	WEL2	WEM-25900
WEE2	WEM-2640	WEM2	WEM-53000
WEF2	WEM-4400	WEN2	WEM-80000
WEG2	WEM-5200		

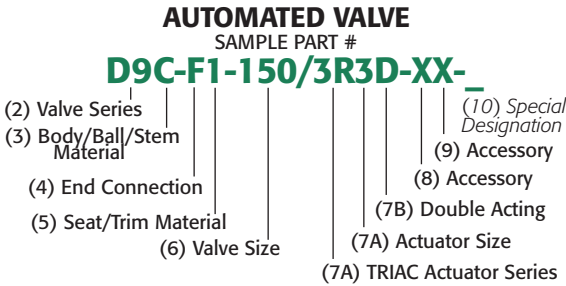

8	Accessories/Options		Model no.
X	No Specials		
A	TYPE 4 Solenoid 120VAC		TVCS-X411-4N-A120
B	TYPE 7 Solenoid 120VAC		TVC6-X411-7N-A120
C	Intrinsically Safe Solenoid		TVIS-X411-4N-D24
D	TYPE 4 Solenoid 24VDC		TVCS-X411-4N-D24
F	TYPE 7 Solenoid 24VDC		TVC6-X411-7N-D24
Q	TYPE 4 SST Solenoid 120VAC		TVSS-X411-4N-A120
M	TYPE 7 SST Solenoid 120VAC		TVSS-X411-7N-A120
L	TYPE 4 SST Solenoid 24VDC		TVSS-X411-4N-D24
N	TYPE 7 SST Solenoid 24VDC		TVSS-X411-7N-D24
P	Pneumatic Positioner		PPR-1200
E	Electro-Pneumatic Positioner		EPR-1000
R	24VDC Electric Actuator		
S	220VAC Electric Actuator		
T	Other Voltage Electric Actuator		
W	12VDC Electric Actuator		
Y	24VAC Electric Actuator		
* No voltage specified on electric assemblies denotes 120VAC			
9	Accessories		Model no.
X	No Specials		
A	TYPE 4 Limit Switch		APL-210N
B	TYPE 7 Limit Switch		APL-510N
C	Intrinsically Safe Limit Switch		APL-218N
Q	TYPE 4 SST Limit Switch		APL-910N
M	TYPE 7 SST Limit Switch		APL-510S
1	HS1 High Speed Electric		
2	HS2 High Speed Electric		
10	Special Designation		
Blank	No Designation, Valve Series Standard		
X	Multiple Option Designation		
A	17-4 PH® Stem		
B	XM-19 (Nitronic 50) Stem		
E	CE/PED Certified		
F	Viton® Seal for Pneumatic Actuators (0°F to 300°F)		